

OUTPUT TRIODE

P.M.2A

OPERATING DATA.

Filament Voltage	2.0 V.
Filament Current	0.2 A.
Max. Anode Voltage	150 V.
Optimum Load	7,000 ohms.


CHARACTERISTICS.

At Anode Volts 100 ; Grid Volts Zero.	
Anode Impedance	3,600 ohms.
Amplification Factor	12.5
Mutual Conductance	3.5 mA/V.

APPLICATION.

As output valve when moderate volume is required from comparatively small signal inputs. Grid bias should be applied according to the following table:

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	4.0	4.0
125	5.0	5.0
150	7.0	6.0

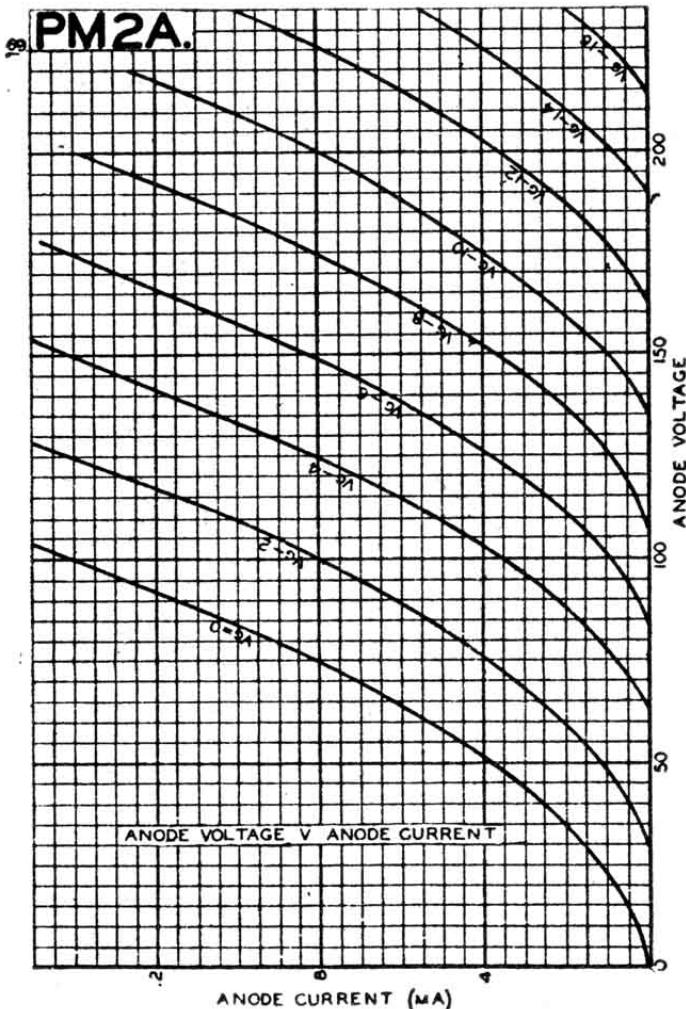

BASE.

Standard 4-pin.

BULB FINISH.

This valve is supplied in clear bulb only.

PRICE 6/-