

V.P.13C



VARIABLE-MU H.F. PENTODE

OPERATING DATA.

Heater Current	0.2 A.
Heater Voltage	13.0 V.
Max. Anode Voltage	200 V.
Max. Auxiliary Grid Voltage	200 V.

CHARACTERISTICS.

At Anode Volts 200; Auxiliary Grid Volts 200; Control Grid Volts Zero.

Mutual Conductance 3.0 mA/V.

APPLICATION.


Radio frequency or intermediate frequency amplifier in circuits where volume control is exercised either manually or automatically by adjustment of grid bias.

BASE.

Standard 7-pin base. For connections see page 110.

BULB FINISH.

This valve is supplied with metallised bulb only.

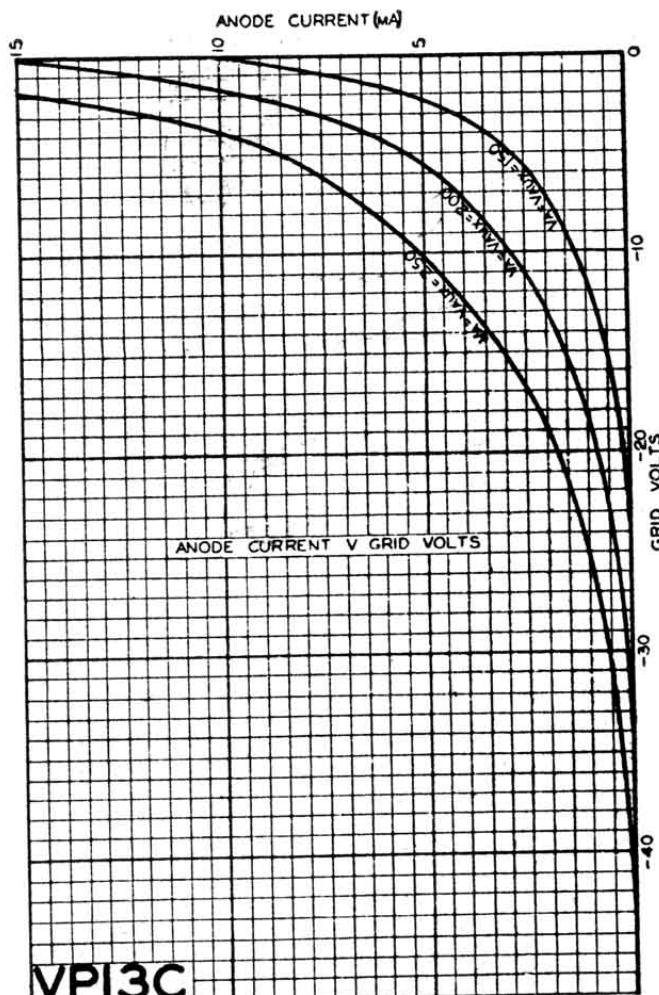

PRICE 12/6