


Type 904V.

INDIRECTLY HEATED MEDIUM IMPEDANCE VALVE

Price 15/-
(In I.F.S. 16/6)

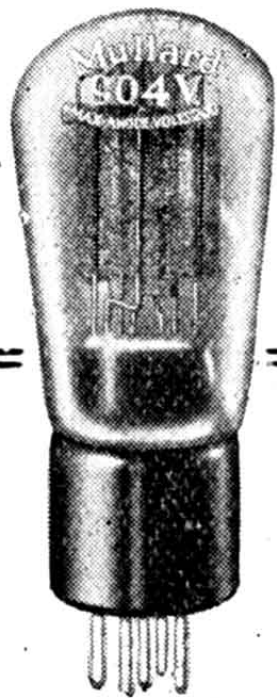

Application.


Detector or low frequency amplifier in A.C. all-mains receiver, following resistance capacity or transformer coupling.

Operating Data.

Max. Heater Voltage 4.0 volts
Heater Current 1.0 amp.
Max. Anode Voltage 200 volts

Characteristics.

- *Anode Impedance 17,000 ohms
- *Amplification Factor 85
- *Mutual Conductance 5.0 mA./volt
- *At Anode Volts 100; Grid Volts, Zero.

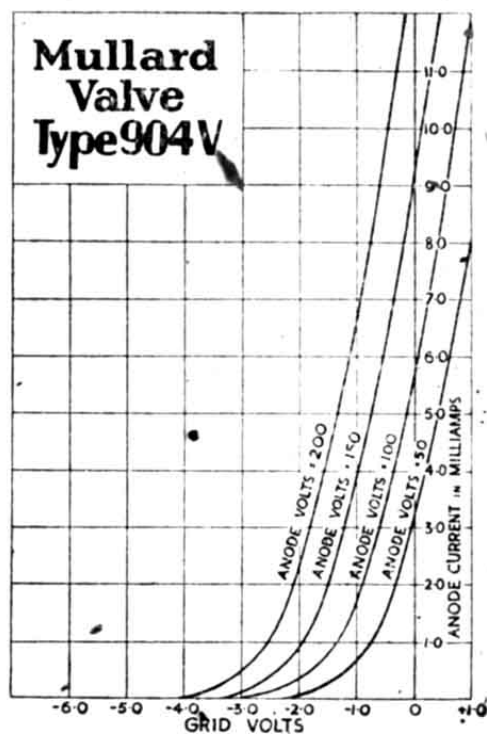

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	0.75	2.5
150	1.0	3.5
200	1.5	4.5

Mullard the Master Valve