


**TYPE MULLARD**  
**D.W.2 DIRECTLY HEATED FULL**  
**WAVE RECTIFIER VALVE**

**APPLICATION.** Full wave rectifier in A.C. mains receivers and H.T. supply units (eliminators) where the total load does not exceed 60 mA. at 250 volts. The D.W.2. is thus suitable for providing generous H.T. supply from the A.C. mains to the average 2-valve or 3-valve all-mains receiver.

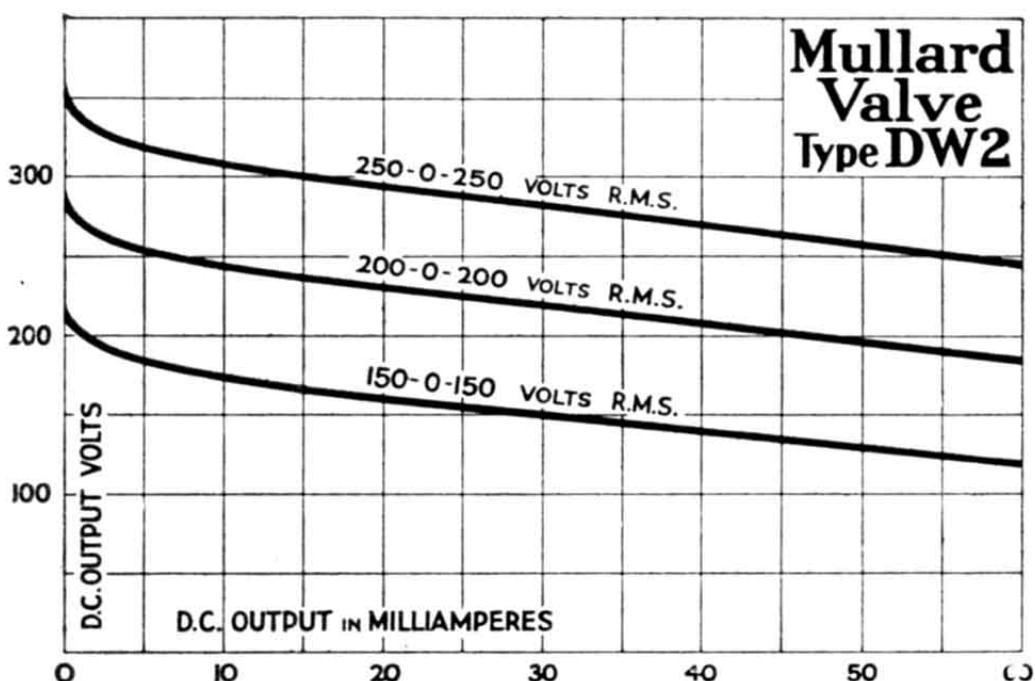

**OPERATING DATA.**

Filament Voltage ... 4·0 V.  
Filament Current ... 1·0 A.  
Max. Anode Voltage 250-0-250 V.  
R.M.S.

**OUTPUT.**

Maximum rectified output  
60 mA. D.C. at 250 V.

**PRICE 12/6**



**Mullard**  
**THE · MASTER · VALVE**

