

Type P.M.202

**“ SUPER POWER ”
OUTPUT VALVE**

Price 13/6
(In I.F.S. 15/-)

Application.


Super-power valve.

Characteristics.

- *Anode Impedance 2,000 ohms
- *Amplification Factor 7
- *Mutual Conductance 3.5 mA./volt
- *At Anode Volts 100 ; Grid Volts, Zero.

Operating Data.

- Max. Filament Voltage 2.0 volts
- Filament Current 0.2 amp.
- Max. Anode Voltage 150 volts

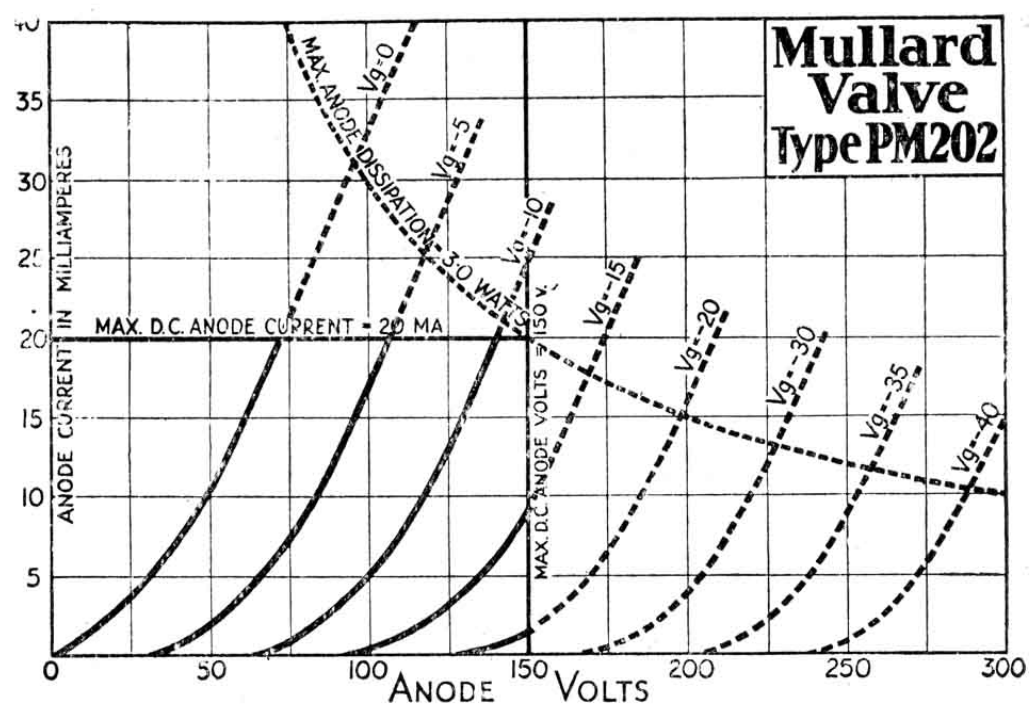

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
75	4.5	8.0
100	7.5	10.0
125	9.0 to 10.5	14.0
150	12.0 to 15.0	14.0

Mullard the Master Valve