




Type P.M.14

SCREENED GRID VALVE

**Price 20/-
(In I.F.S. 22/-)**

Application.

Screened-grid high frequency amplifying stages.

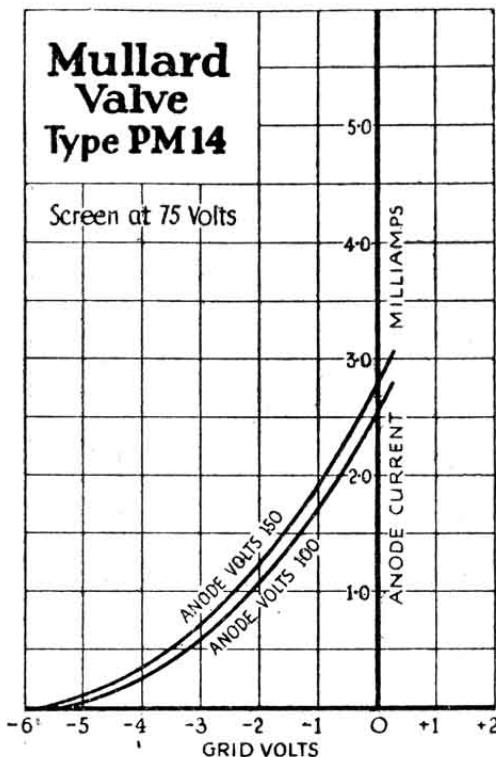

Operating Data.

| | |
|-------------------------|------------|
| Max. Filament Voltage | 4.0 volts |
| Filament Current | 0.075 amp. |
| Max. Anode Voltage | 150 volts |
| Positive Screen Voltage | 75 volts |

Characteristics.

| | | | |
|-----------------------|----|----|---------------|
| *Anode Impedance .. | .. | .. | 230,000 ohms |
| *Amplification Factor | .. | .. | 200 |
| *Mutual Conductance | .. | .. | 0.87 mA./volt |

*At Anode Volts 100 ; Screen Volts 75 ; Grid Volts, Zero.

Mullard the Master Valve