

Type P.M.3A.

HIGH IMPEDANCE VALVE

Price 8/6
(In I.F.S. 9/6)

Application.



High frequency amplifier or detector followed by resistance-capacity coupling.

Operating Data.

Max. Filament Voltage 4.0 volts
Filament Current 0.075 amp.
Max. Anode Voltage 150 volts

Characteristics.

*Anode Impedance 55,000 ohms
*Amplification Factor 38
*Mutual Conductance 0.66 mA./volt
*At Anode Volts 100; Grid Volts, Zero.

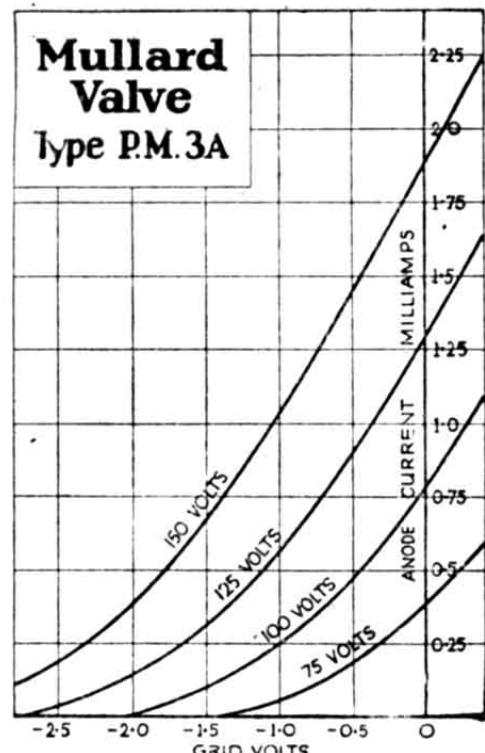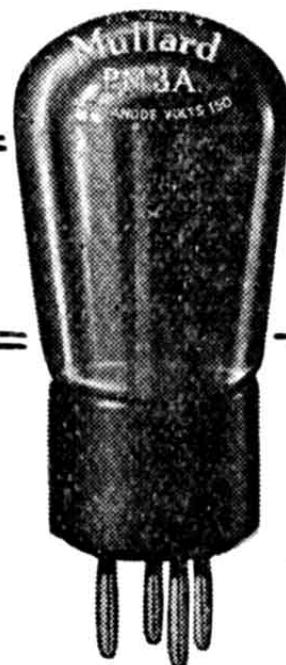

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
75	0	0.35
100	0 to 1.5	0.45
125	0 to 1.5	0.55
150	1.5	0.65

Mullard the Master Valve