


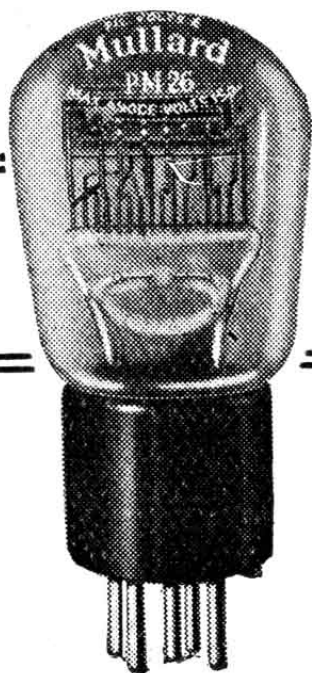

Type P.M.26

FIVE-ELECTRODE OUTPUT VALVE

Price 20/-
(In I.F.S. 22/-)

Application.

Five-electrode output valve (Pentode).


Operating Data.

Max. Filament Voltage
6.0 volts

Filament Current
0.17 amp.

Max. Anode Voltage
150 volts

Max. Aux. Grid Voltage
150 volts

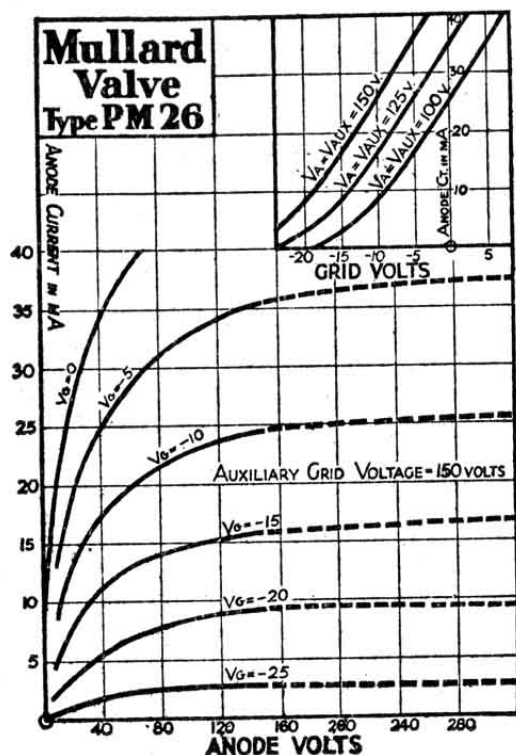

Characteristics.

*Mutual Conductance
2.0 mA./volt

*At Anode Volts 100 ; Auxiliary
Grid Volts 100 ; Control Grid
Volts, Zero.

Grid Bias Table.

Aux. Grid Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
75	6.0	7.0
100	9.0	11.0
125	12.0	15.0
150	15.0	19.0

Mullard the Master Valve