



Type S.4V.

**INDIRECTLY HEATED
SCREENED
GRID VALVE**

Price 22/6


(In I.F.S. 24/9)

Application.

Screened-grid high frequency amplifying valve for A.C. all-mains receivers.

Operating Data.

Max. Heater Voltage	4.0 volts
Max. Heater Current	1.0 amp.
Max. Anode Voltage	200 volts
Positive Screen Voltage	75 volts

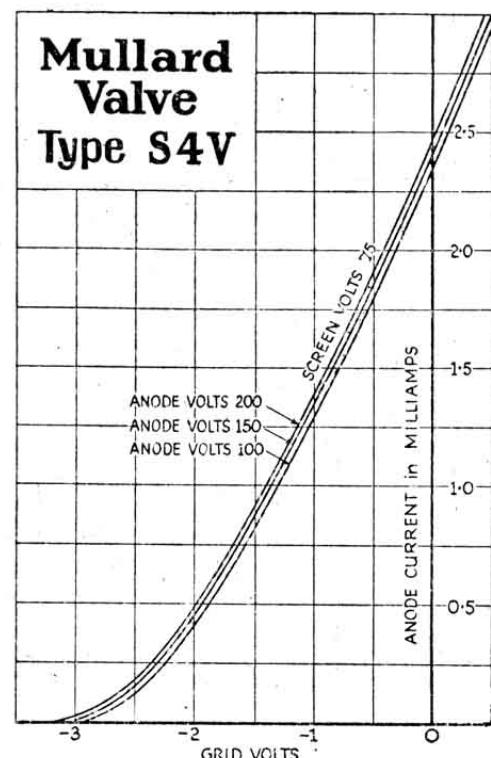

Characteristics.

*Anode Impedance 909,000 ohms
*Amplification Factor 1,000
*Mutual Conductance 1.1 mA./volt
*At Anode Volts 100; Grid Volts, Zero; Positive Screen Volts 75.	

Mullard the Master Valve