

Type 354V.

INDIRECTLY HEATED SUPER DETECTOR VALVE

Price 15/-
(In. I.F.S. 16/6)

Application.


Detector or low frequency amplifier in A.C. all-mains receivers, followed by transformer coupling.

Operating Data.

Max. Heater Voltage 4.0 volts
Heater Current 1.0 amp.
Max. Anode Voltage 200 volts

Characteristics.

*Anode Impedance 10,000 ohms
*Amplification Factor 35
*Mutual Conductance 3.5 mA./volt
*At Anode Volts 100; Grid Volts, Zero.

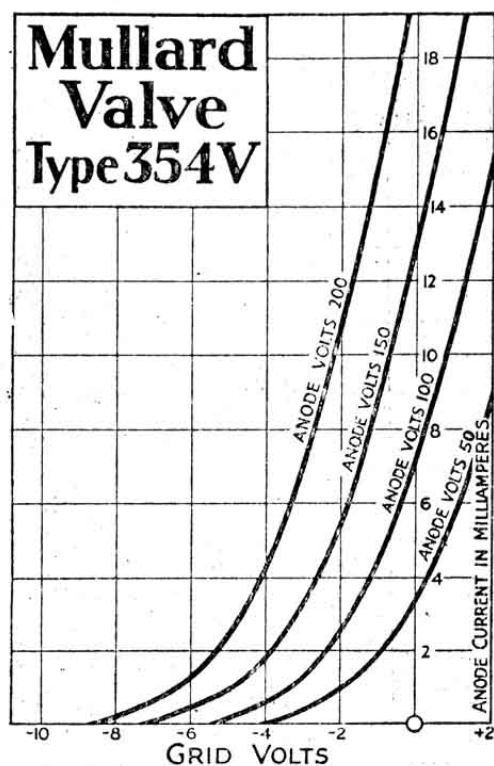

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	2.0	2.0
150	3.0	3.0
200	4.0	4.0

Mullard the Master Valve