

Type PEN 4V.

INDIRECTLY HEATED FIVE ELECTRODE OUTPUT VALVE

Price 25/-
(In I.F.S. 27/6)

Application.


Five-electrode output valve (Pentode) in A.C. all-mains receivers.

Characteristics.

- *Mutual Conductance 3.0 mA./volt
- *At Auxiliary Grid Volts 100 ; Control Grid Volts, Zero.

Operating Data.

Max. Heater Voltage	4.0 volts
Heater Current	1.0 amp.
Max. Anode Voltage	250 volts
Max. Auxiliary Grid Voltage	200 volts

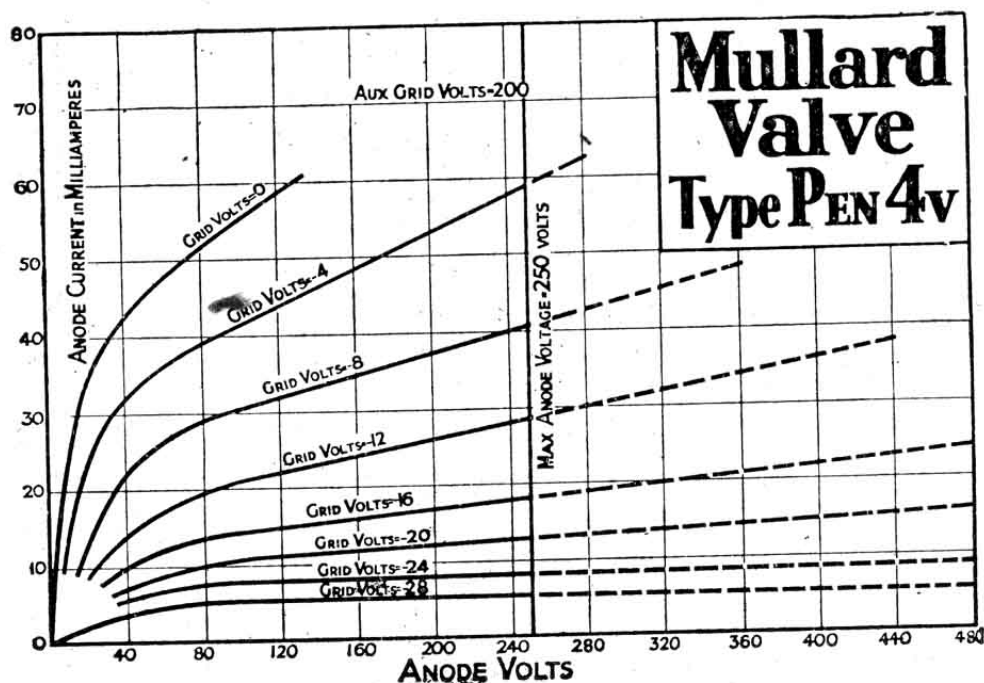

**Mullard
Valve
Type PEN 4v**

Grid Bias Table.

Aux. Grid Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
200	10.0	35.0

Mullard the Master Valve