

Type DO.24.

DIRECTLY HEATED OUTPUT VALVE

Price 30/-
(In I.F.S. 33/-)

Application.


Output valve for powerful receivers and amplifiers.

Characteristics.

- *Anode Impedance 1,670 ohms
- *Amplification Factor 10
- *Mutual Conductance 6.0 mA./volt
- *At Anode Volts 100 ; Grid Volts, Zero.

Operating Data.

- Max. Filament Voltage 4.0 volts
- Filament Current 2.0 amp.
- Max. Anode Voltage 400 volts

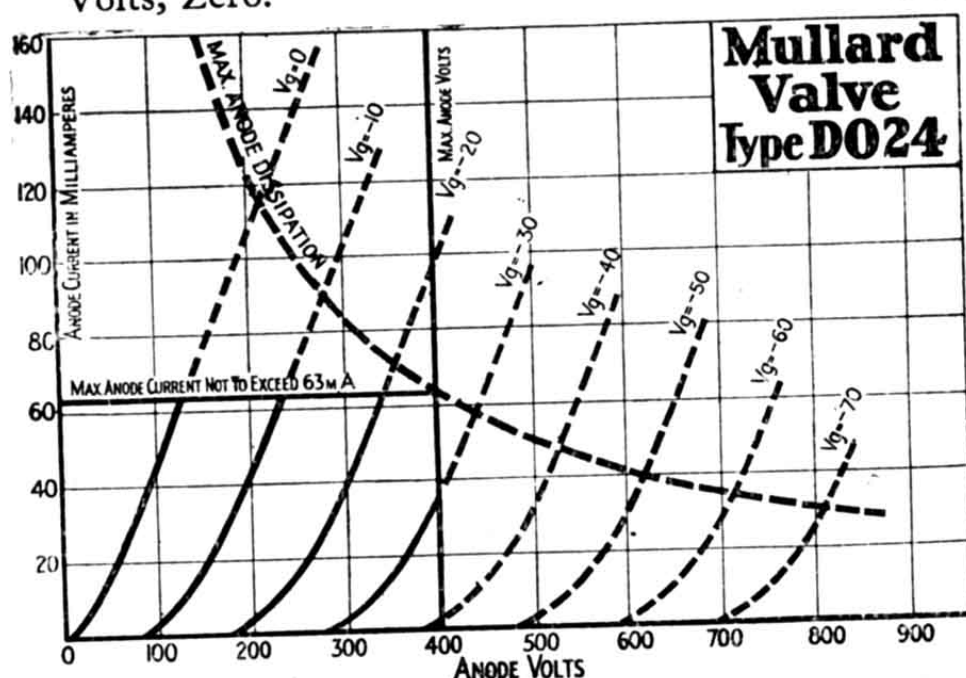

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
200	12.0	30.0
300	18.0	48.0
400	25.0	63.0

Mullard the Master Valve