

# Type DO.60

## DIRECTLY HEATED OUTPUT VALVE

Price £5 10 0

(In I.F.S. £6 8 6)

### Application.

Output valve for powerful receivers and amplifiers.

### Characteristics.

\*Anode Impedance

1,000 ohms.

\*Amplification Factor 3.5

\*Mutual Conductance

3.5 mA./volt

\*Under working conditions,  
viz., Anode Volts 500,  
Anode Current 120 mA.

### Operating Data.


Max. Filament Voltage

6.0 volts

Filament Current 4.0 amp.

Max. Anode Voltage

500 volts

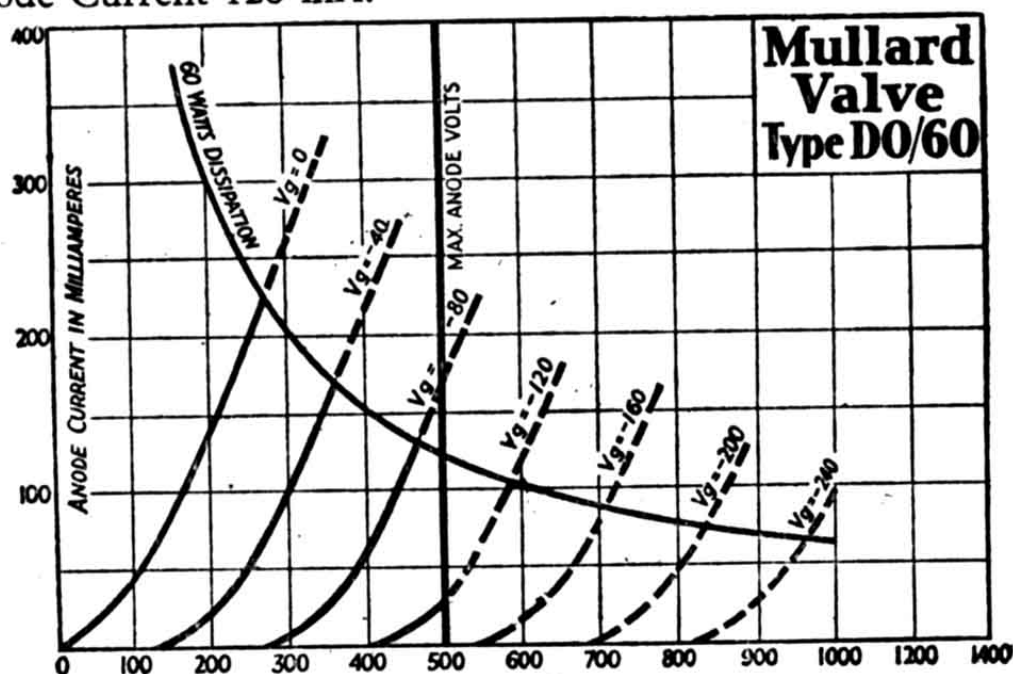

Grid Bias Table. ANODE VOLTS

| Anode Voltage. | Approx. Neg. Grid Bias Voltage. | Approx. Anode Current (mA). |
|----------------|---------------------------------|-----------------------------|
| 300            | 42.0                            | 82.0                        |
| 400            | 65.0                            | 120.0                       |
| 500            | 95.0                            | 120.0                       |

**Mullard the Master Valve**