


AUTOMATIC GRID BIAS—cont.

VI. Indirectly-heated pentode.

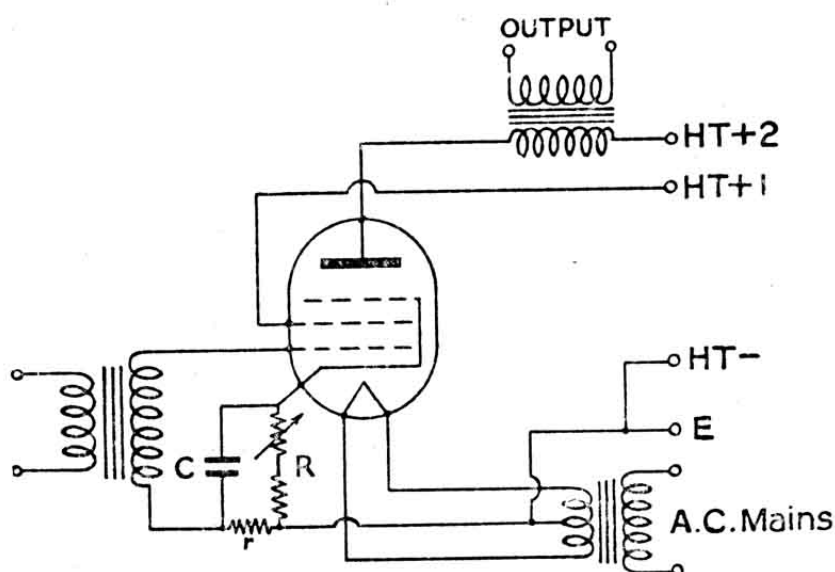

R = Bias Resistance
 C = 2mfd Condenser
 r = De-Coupling
 Resistance-100,000ohms

METHOD OF OBTAINING
 AUTOMATIC GRID BIAS
 FOR INDIRECTLY HEATED
 PENTODE VALVE

Valve Type.	Total Value of Biassing Resistance (Ohms).	Fixed Portion of Biassing Resistance (Ohms).	Variable Portion of Biassing Resistance (Ohms).
PEN.4V	500	250	250